




# TM 127-1.4-8.5 Thermoelectric Cooling Module

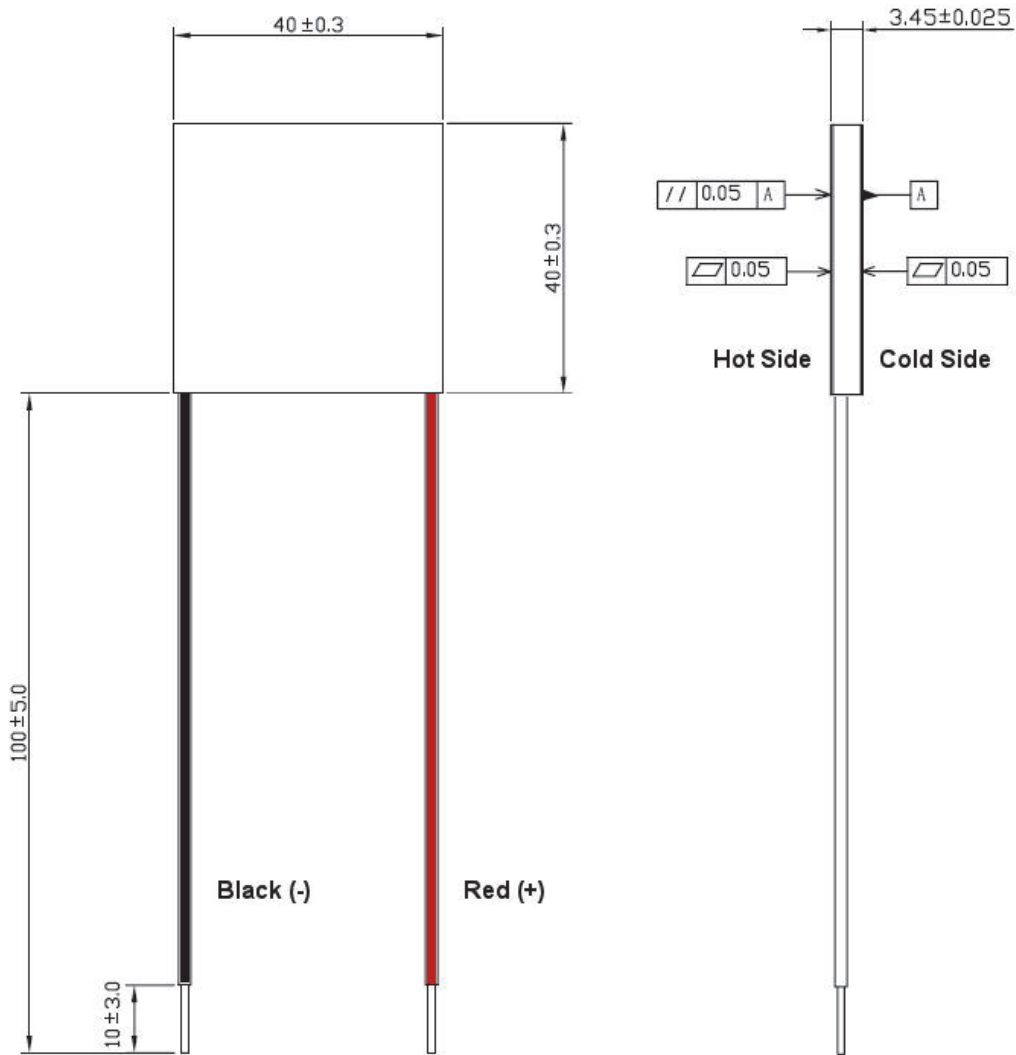

**$I_{\max} = 8.5$  Amps** ( $I_{\max}$  is the maximum current at  $\Delta T_{\max}$ )

**$V_{\max} = 16$  Volts** ( $V_{\max}$  is maximum voltage at  $\Delta T_{\max}$ )

**$Q_{c\max} = 78$  Watts** ( $Q_{c\max}$  is maximum cooling capacity at  $I_{\max}$ ,  $V_{\max}$  and  $\Delta T = 0$  °C)

**$\Delta T_{\max} = 70$  °C** ( $\Delta T_{\max}$  is maximum temperature difference at  $I_{\max}$ ,  $V_{\max}$  and  $Q_c = 0W$ )

**TM 127-1.4-8.5 Web Page Link**

ADVANCED THERMOELECTRIC

Toll-Free 1 (866) 665-5434

(603) 888-2467

[sales@electracool.com](mailto:sales@electracool.com)

Copyright © 2017 Pollock Industries, Inc.